


SIK Tractor

JPVS02

3+

Certified
EN1176
product

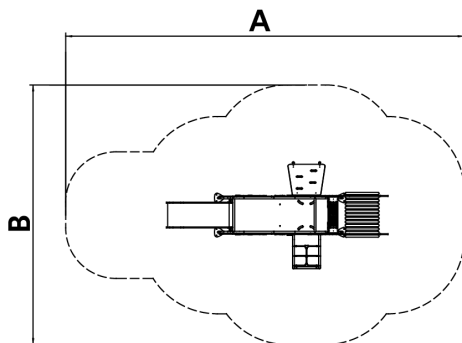

Structure, Metal: hot-dip galvanised and powder coated 80x80x2mm posts resistant to abrasion, corrosion and bad weather conditions. 2mm thick AISI 304 polished stainless steel slide surface curved and molded in one piece. Ø32mm protective bars made of AISI 304 stainless steel.


A x B




A=7890mm 29m² 0.90m 6

B=5120mm

SD



SB



Materials:

Panels, ECOPLAY: 10-12-15-19mm thick HPDE produced with recycled materials. High-density polyethylene characterised by its resistance to chemical abrasives. As a polymer, it is unaffected by corrosion. Due to its light elastic nature, it offers high resistance to impact, making it very difficult to break.

Platforms, Phenolic: birch plywood coated with a phenol film on both sides. Wire mesh anti-slip surface. Waterproof lateral protection.

Nets, Anti-vandal reinforced rope: Ø 16mm, 6 twisted steel cables, covered in polypropylene. High durability plastic connectors.rs.

Fixings: electro galvanised and stainless steel quality 8.8 DIN267, AISI-304.

- None of the materials requires a specific treatment for its disposal.
- If the product is subject to severe use, maintenance should be increased.
- Don't use the product before the installation/maintenance is ready.
- Please check the maintenance instructions.


Biggest part (mm): 1900x2500x70 / Heaviest part (kg): 98

IMPACT ZONE: security area and ground coverings according to the EN1176-1:2017 standard.

Spare parts availability: 10 years.

Ground anchoring screws not included.

Playful features:



Alternatives:



JPVS01

JPVS04

JPVS03