



UM374

Bench

# Bretaña



Controlled  
logging



Black forje  
casting




**Bench BRETAÑA 1800**, total dimensions (length x height x depth) 1800x770x630 mm, manufactured with ductile iron legs (treated with the Ferrus process, the triple-layer protector for iron, which guarantees optimal corrosion resistance). Epoxy primer finish and black forging polyester powder paint. Four natural tropical wood planks (treated with a triple-layer Lignus coating, a fungicidal, insecticidal and water-repellent protector). Stainless steel screws. Prepared for anchoring with M10 expansion bolts according to surface and project.

Optional not included: Customizable marking with 74x35 mm aluminum plate or milled board.

**Ductile Iron treated with FERRUS:** iron protection process that ensures optimal corrosion resistance. The Ferrus treatment consists of three layers applied after cleaning all dirt and impurities using shot blasting, involving an electrolytic bath followed by an epoxy primer and a final coating of polyester powder paint. Forged black colour

**Hardwood treated with LIGNUS:** Wood from responsible forestry. Density greater than 930kg/m<sup>3</sup>, at 12% humidity, treated with a triple-layer LIGNUS coating, fungicide, insecticide, and water-repellent that provides protection against moisture penetration. Final finish with a layer of natural pigment in a satin finish, which provides additional protection against UV rays, the main cause of deterioration in this type of material.

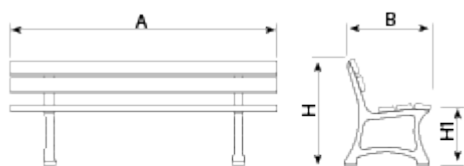

| Ref.   | A    | B   | H   | H1  |
|--------|------|-----|-----|-----|
| UM374  | 1800 | 630 | 770 | 445 |
| UM374B | 1800 | 500 | -   | 445 |

**Breña B**  
UM374B



**Recycled Polymers**  
UM374PRH



**Technical Wood**  
UM374MTP



V. 2026-02-02 | The constant improvement and evolution of our products may result in some modifications of the technical specifications and characteristics of the products without prior notice.